

Features

- 12W Series Wall Mount
- High Power in Compact Size
- Energy Star 2.0

Applications

- Mobile Devices
- Pos machine
- Audio & Video product
- ADSL
- Set-top-box
- Household appliance

Protection

- Short Circuit Protection
- Over Current Protection
- Over Voltage Protection

Safety

- EMI:FCC Part 15,Class B
- Safety Standards: UL60950-1/CSA22.2,EN60950-1, AS/NZS60950-1,BS EN60950-1




Specifications

ITEM	SPECIFICATION	MIN	TYP.	MAX	Unit
Input Rated Voltage	Single Phase	100	115/230	240	V
Input Voltage Range	Single Phase	90		264	V
Input Rated Frequency	Single Phase		50/60		Hz
Input Frequency Range	Single Phase	47		63	Hz
Input Rated Current	Typical Input Voltage& Output At Full Load			0.3	A
Input In-rush Current	Typical Input Voltage& Output At Full Load			60	A
Static Power Consumption	Typical Input Voltage& Output At No Load			0.3	W
Average Efficiency	at 115Vac/60Hz and 230Vac/50Hz with 100%, 75%, 50% and 25% rated load	77.85			%
Output Rated Voltage	Typical Output Voltage Range ±5%	11.4	12.0	12.6	V
Output Rated Current		0.1		1.0	A
Output Rated Power				12.0	W
Ripple and Noise	Typical Input Voltage& Typical Load Current			150	mV
Protection	Short Circuit, Over Current, Over Voltage Protection				
Hi-Pot Test	3000V rms / 50Hz, 60 sec, 10mA Max				
Insulation Resistance	Input to Output,DC500V,10MΩ MIN				
Temperature	Operating: -0℃ to + 40℃,Storage: -40℃ to + 80℃				
Humidity	Operating: Up to + 90%,Storage: Up to + 90%				
DC Plug/Cable Length	5.5×2.5×10mm Fork&Groove/1500mm UL2468 24AWG WIRE/EIAJ				

For further information contact:
www.vistektechnology.com


12W Series Wall Mount

Enclosure drawing

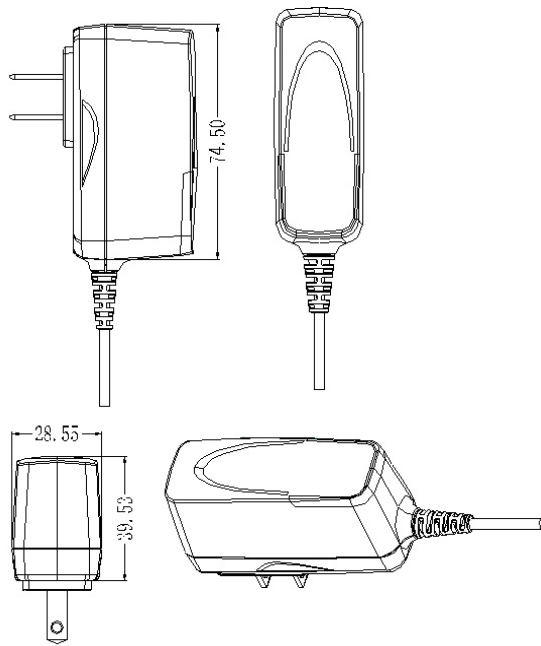

- Physical size:
US:74.50mm (L)×28.55mm (W)×39.53mm(H)
EU:74.50mm (L)×28.55mm (W)×39.53mm(H)
UK:74.50mm (L)×48.50mm (W)×46.09mm(H)
AU:74.50mm (L)×41.46mm (W)×47.49mm(H)
- Material: PC, 94V-0
- Color: Black/White

Packing Information

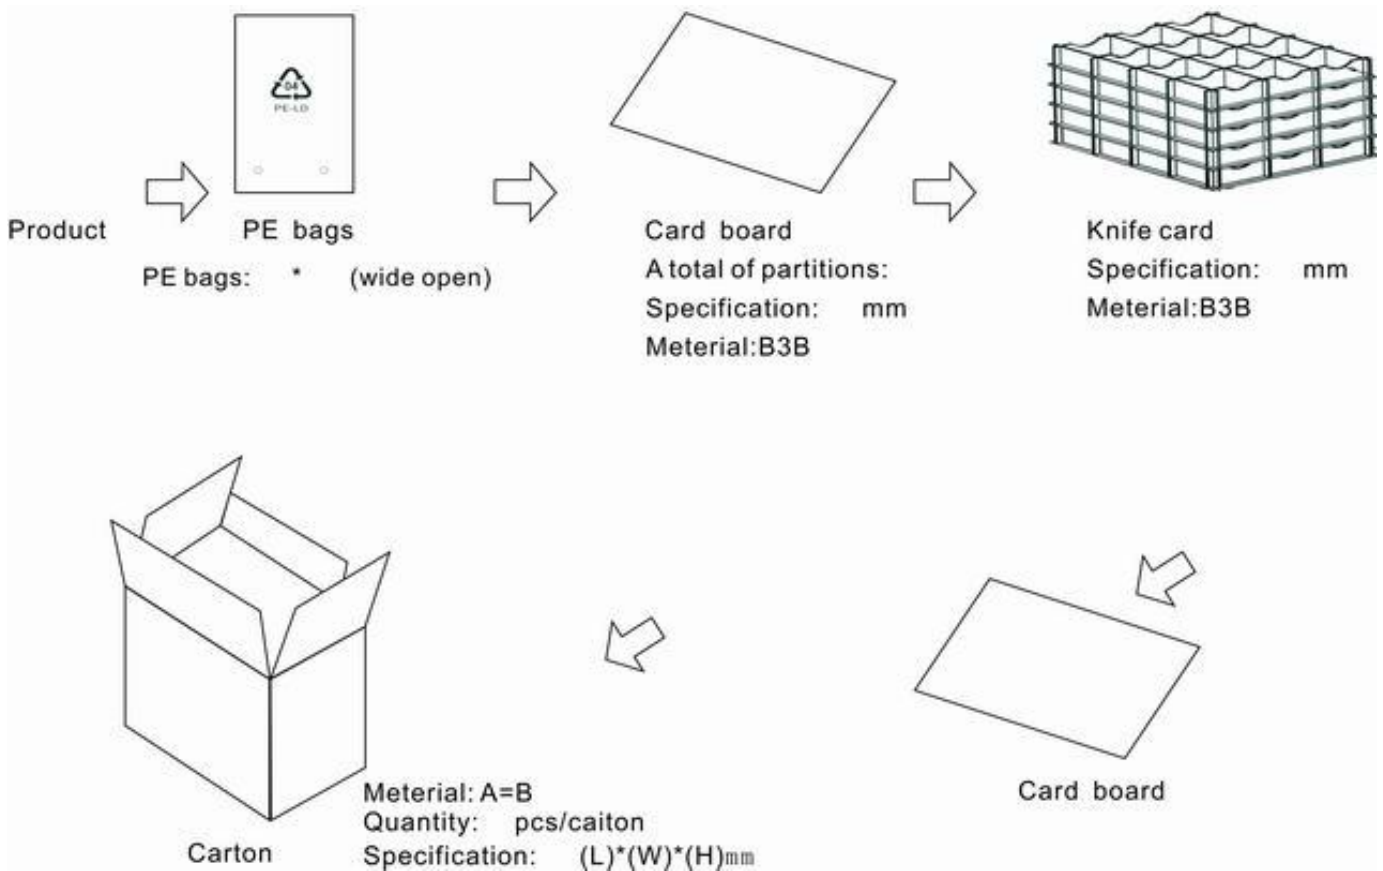

For further information contact:
www.vistektechnology.com